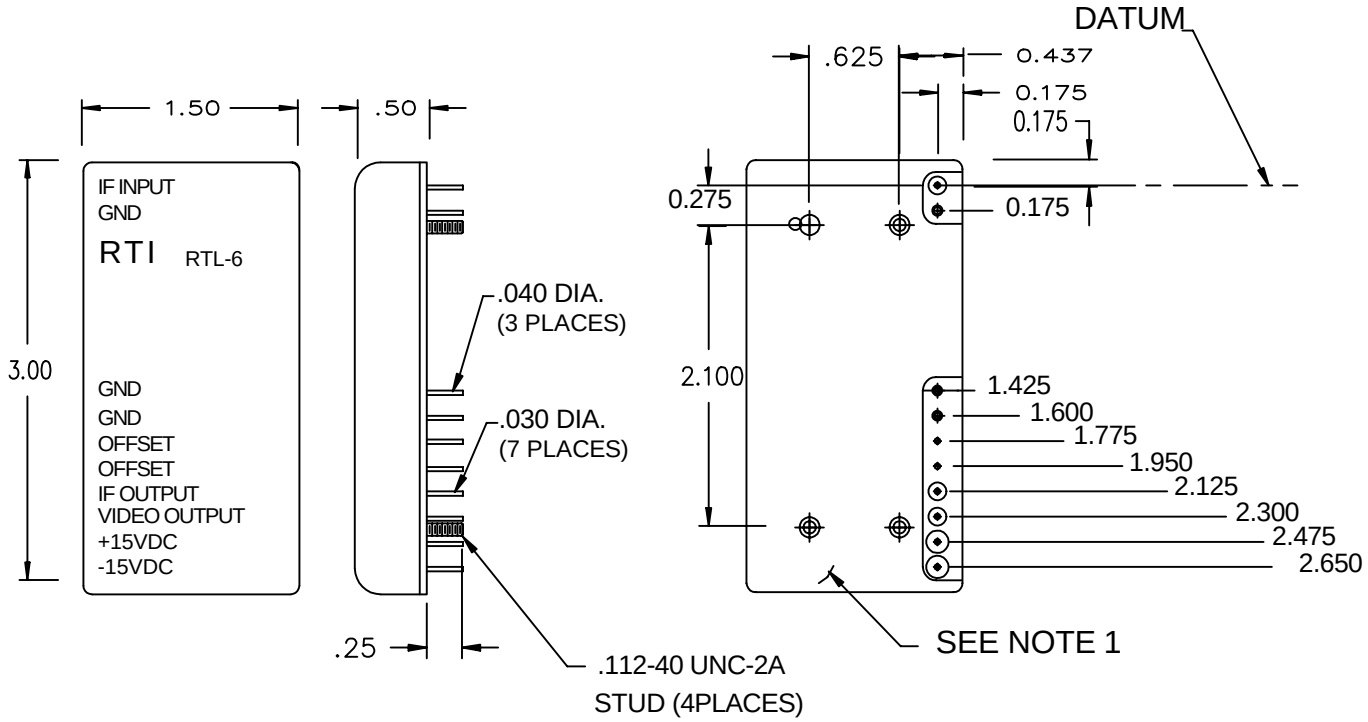

Notes:
1. This surface should be in direct contact with the mounting surface.

OUTLINE
HERMETICALLY SEALED
LOGARITHMIC AMPLIFIER
RTL-6 SERIES

Radar
Technology
Incorporated

TOLERANCES ARE:	
DECIMAL .XX	± .020
.XXX	± .010

1500-298